

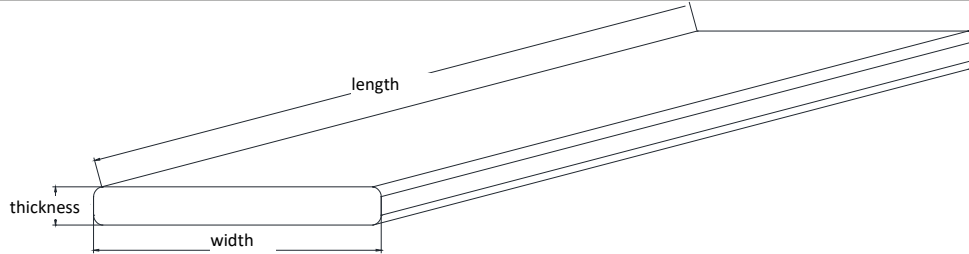
DECKING



QUALITY CONTROL - PRODUCT DATA SHEET MADERACRE TIMBER


Code:	
Version:	
Date:	16/05/2025

Product:	DECKING
----------	---------



TYPES OF PROFILES AND FINISHING

SMOOTH PROFILE



PROFILE WITH SLOTS



PROFILE:	S4S - E4E with 3 mm radius.
----------	-----------------------------

FINISHING:	SMOOTH (Plain) or GROOVED (Antislip).
------------	---------------------------------------

NOTE:	The profiles and finishing shown are referential and may vary according to customer requirements..
-------	--




DIMENSIONS:

Factura/Cubicación				Tolerancia		
Thickness (mm)	Width (mm)	Length (mm)	Shorts (mm)	Thickness (mm)	Width (mm)	Length (mm)
19	90	2159 a 6121	1244 a 1549	(- 0.00/+ 0.40)	(- 0.2/+ 0.2)	(- 10mm/+ 5mm)
19	140	2159 a 6121	1244 a 1549	(- 0.00/+ 0.40)	(- 0.2/+ 0.2)	(- 10mm/+ 5mm)
21	90	2159 a 6121	1244 a 1549	(- 0.00/+ 0.40)	(- 0.2/+ 0.2)	(- 10mm/+ 5mm)
21	120	2159 a 6121	1244 a 1549	(- 0.00/+ 0.40)	(- 0.2/+ 0.2)	(- 10mm/+ 5mm)
21	145	2159 a 6121	1244 a 1549	(- 0.00/+ 0.40)	(- 0.2/+ 0.2)	(- 10mm/+ 5mm)

NOTE:	As for the length dimensions, they vary according to the client's requirements, but the ideal is to maintain the defined length dimension + 25mm.
-------	---

MOISTURE CONTENT:	KD 10% - 16%. Up to 10% of pieces with 9% and 10% of pieces with up to 18% are accepted.
-------------------	--

QUALITY:	A. Review "Decking Classification and Packaging Manual."
----------	--

TWIST	BOW	CROOK	CUP	SQUAD
				Up to 3mm of squareness is acceptable at both ends.
As long as it is corrected with minimum pressure..	Up to 10mm per 1000mm of length is accepted.	Up to 10mm per 1000mm of length is accepted.	As long as it is corrected with minimum pressure.	

PRESENTATION:	In standard packages and/or as required by the customer. See "Decking Classification and Packaging Manual."
---------------	---

APPLICATIONS:	Outdoor use, residential and high traffic commercial.
---------------	---

RECOMMENDATIONS:	Apply oil or other protective sealant for outdoor and UV use.
------------------	---

NOTI:	No structural analysis or load testing has been performed on this product. The determination of appropriate use conditions remains the responsibility of the end user/contractor
-------	--



Buy safe, buy FSC® certified timber
FSC-C148139

