



LAMINATED FJ SLATS OF HARDWOODS



PRODUCT DATA SHEET MADERACRE TIMBER

Code:	
Version:	
Date:	16/05/2025

Product: LAMINATED FJ SLATS OF HARDWOODS

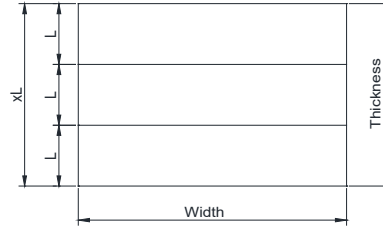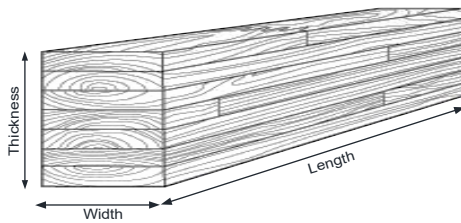

DIMENSIONS:						TOLERANCE:		
Nro	Thickness (mm)	Width (mm)	Max length (mm)	Sheets	Finishing	Thickness	Width	Length
1	38	58	2100 a 6000	2L, 3L	S4S - E4E	(- 0.5/+ 0.5) mm	(- 1.0/+ 1.0) mm	(- 5mm/+ 5mm)
2	41	64	2100 a 6000	2L, 3L	S4S - E4E	(- 0.5/+ 0.5) mm	(- 1.0/+ 1.0) mm	(- 5mm/+ 5mm)
3	40	70	2100 a 6000	2L, 3L	S4S - E4E	(- 0.5/+ 0.5) mm	(- 1.0/+ 1.0) mm	(- 5mm/+ 5mm)

*Special dimensions can be produced.

FINISHING: S4S - E4E (3mm Radius Molding)

*IMPORTANT: No torn fiber (DENTING) is allowed on the faces, small scratches noticeable by planing are acceptable.

SHAPE: Squaring: Up to 3mm of squariness is acceptable at both ends.

FINGERJOINT STRUCTURE:

- The pieces have the following characteristics:
- 1). Fingerjoint piece length: minimum 150mm, maximum 900mm.
- 2). Fingerjoint Position: Horizontal (Teeth are visible on the edge of each blade).
- 3). Parts glueing: With PUR adhesive of EN 204 Class D4 standard.
- 4). It does not present Formaldehyde emissions.

LAMINATE:

- The sheets have the following characteristics:
- 1). Thickness of each sheet: 15 and 19 mm.
- 2). Sheets glueing: With PUR adhesive according to EN 204 Class D4.
- 3). It does not present Formaldehyde emissions.

QUALITY: The face is considered A/B quality. (Sapwood and/or holes may be present on no more than a third of the face surface.)

PRESENTATION: The face is considered A/B quality. (Sapwood and/or holes may be present on no more than a third of the face surface.)

Attention: Read the following instructions. You are advised to follow these recommendations and, if you have any questions, consult your supplier.

APPLICATIONS AND INSTALLATION: Finger Joint laminate underdeck or batten for outdoor installation is recommended under some type of roof. As an underdeck, it should be installed in a position where the sheets are visible at the edges. It is recommended to follow these steps for safety.

MAINTENANCE: If used as decorative outdoors (lattices), annual maintenance is suggested, and oil or another sealant must be used to maintain durability and minimize the risk of the joints coming loose.

NOTE: No structural analysis or load testing has been performed on this product. The determination of appropriate use conditions remains the responsibility of the end user/contractor



Buy safe, buy FSC® certified timber
FSC-C148139

