


PRODUCT DATA SHEET

MADERACRE TIMBER

Code:	
Version:	
Date:	16/05/2025

Product: LUMBER

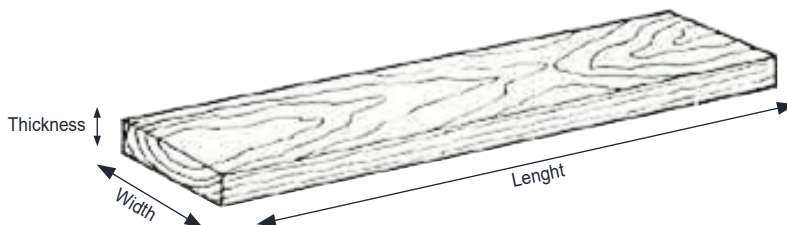

DIMENSIONS:				TOLERANCE:		
Product	Thickness (mm)	Width (mm)	Length (mm)	Thickness (mm)	Width (mm)	Length (mm)
Commercial Lumber	26	152.4 a +	1,828.8 a +	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	39	152.4 a +	1,828.8 a +	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	51	152.4 a +	1,828.8 a +	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
Long&Narrow Lumber	26	127 a -	1,828.8 a +	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	39	127 a -	1,828.8 a +	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	51	127 a -	1,828.8 a +	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
Short Lumber	26	101.6 a +	1,524 a -	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	39	101.6 a +	1,524 a -	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	51	101.6 a +	1,524 a -	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
Cutoffs	26	76.2 a -	1,524 a -	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	39	76.2 a -	1,524 a -	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)
	51	76.2 a -	1,524 a -	(- 1/+ 2) mm	(- 1mm/+6mm)	(- 0mm/+ 50mm)

ACABADO: Sawing/S2S.

Plained material (S2S) can be - 2 mm (extended lack of planing on both sides is acceptable), - 3 mm (focused lack of planing on both sides is acceptable) and - 6 mm (lack of planing is not acceptable) in thickness depending on the destination.

CONTENIDO DE HUMEDAD: KD 10% - 14%.

SHAPE:

Twisting	Bowing	Bending	Cupping	SQUAD
				Varied (as long as it is covered by the oversize in length).
Up to 6mm in #1 CyM and 12mm in #2 C.	Up to 25mm per 1" per 3000mm length is accepted.	Up to 25mm is accepted every 3000mm of length.	Up to 3mm in #1 CyM and 6mm in #2 C.	

CALIDAD: #1C, #2C and #3C (NHLA Standard Specification).

PRESENTACIÓN: In standard packages, maximum 2 lengths per package.

NOTA: No structural analysis or load testing has been performed on this product. The determination of appropriate use conditions remains the responsibility of the end user/contractor